


LEASE AREA (16x16')

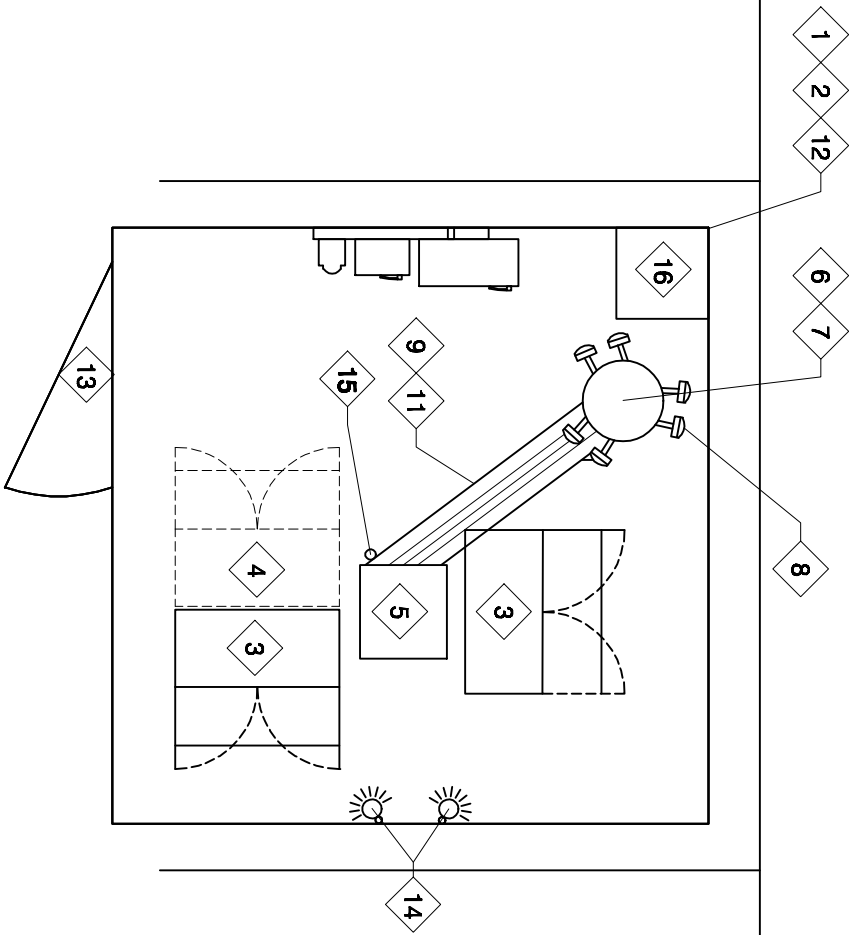

CONSTRUCTION PLAN KEYED NOTES

- 1 LEASE AREA LINE, REFER TO SHEET #1 FOR ADDITIONAL INFORMATION. (16' x 16')
- 2 CONCRETE PAD (8'x12')
- 3 PRIMARY BASE TRANSCIVER STATION (BTS) LOCATION (PROVIDED BY T-MOBILE).
- 4 SECONDARY BASE TRANSCIVER STATION (BTS) LOCATION (PROVIDED BY T-MOBILE).
- 5 SYSTEM DEMARCATION CABINET (BASE CONNECTION TO BTS UNITS)
- 6 TELEPHONE CONNECTION AND ANTENNA CONNECTION
- 6 NEW ANTENNA SUPPORT STRUCTURE FOUNDATION ENGINEERING DONE BY OTHERS
- 7 NEW 60' ANTENNA SUPPORT STRUCTURE (PROVIDED BY T-MOBILE) SEE T-MOBILE PROJECT MANUAL FOR EXACT TYPE
- 8 PCS FLUSH MOUNT ANTENNAS (PROVIDED BY T-MOBILE)
- 8 COAXIAL CABLEING TO ANTENNAS (PROVIDED BY T-MOBILE)
- 10 SEE SHEETS #2, #3, #4 FOR GROUNDING TYPICAL
- 11 PEDESTAL MOUNTED WAVE GUIDE BRIDGE
- 12 NEW 6" CHAIN LINK FENCE TO SURROUND LEASE AREA PERIMETER
- 13 6" WIDE SWINGING CHAIN LINK GATE (TO MATCH EXISTING GATES ON PREMISES)
- 14 TWO SPOTLIGHTS WITH 2 HOUR TIMERS MOUNTED ON 6" METAL POLE WITH T1 FRAME
- 15 600S ANTENNA (PROVIDED BY T-MOBILE)
- 16 BATTERY CABINET (PROVIDED BY T-MOBILE).
- 17 METER BASE AND TELCO BOX PEDESTAL

SITE NOTES

- 1. VERIFY AZIMUTHS WITH FINAL SITE CONFIGURATION SHEET FROM R.F. ENGINEER.
- 2. PROVIDE 4" CONDUIT EQUIPPED WITH 1 PULL STRING AND (2) 6 PAIR 22 GAUGE WIRES. ALL TELCO CONDUITS AND TELCO WIRING MUST MAINTAIN A MINIMUM SEPERATION DISTANCE OF 18" AWAY FROM ALL AC POWER CONDUITS AND WIRING.
- 3. DOGHOUSE EQUIPPED WITH 2 PLYWOOD BACKBOARDS 28"x21"x3/4" THICK.
- 4. DOGHOUSE EQUIPPED WITH 1-#6 GREEN GROUND WIRE 6 FEET LONG WITH 1 END CONNECTED TO GROUND BUS BAR.
- 5. 1 FOURPLEX 120 A/C OUTLET INSTALLED IN DOGHOUSE BUT NOT MOUNTED ON PLYWOOD BACKBOARDS.
- 6. PROVIDE TELECT 8 T1 DSX UNIT TO OPERATIONS FOR T1 MAINTENANCE. TELECT PART #010-6008-0001.

DATE:09-25-2008

DRAWN BY: TYSON HACKIN (COMLINK LS)

CHECKED BY: MIKE HANSEN

FILE: T-MOBILE/KENNEDY JUNIOR HIGH SCHOOL

REVISIONS

DATE	DESCRIPTION	INITIALS
09-25-2008	ZONING DRAWINGS	TLH

NOT VALID UNLESS SIGNED



121 W. Election Rd.  
Suite 330  
Draper, UT 84020  
801.860.0086  
Fax 801.816.4420

COMLINK  
LAND SERVICES

860 EAST 4500 SOUTH SUITE 312  
SUITE 312  
SALT LAKE CITY, UTAH 84107  
801-288-4083

SITE NUMBER:  
SL01569B  
4465 SOUTH 4800 WEST  
WEST VALLEY CITY, UT. 84120

SITE PLAN

SCALE 1:100

