



NOTES

- 1. LIGHT ON POLE TO BE REINSTALLED AT THE SAME HEIGHT ON THE NEW POLE AS ON THE EXISTING LIGHT POLE.
- 2. NEW POLE TO BE PAINTED TO MATCH LIGHT POLES AT EXISTING SITE.
- 3. ANY VEGETATION AND IRRIGATION PIPES NOT INSIDE LEASE AREA DISTURBED DURING CONSTRUCTION TO BE REPLACED.

LEASE AREA (16x16')

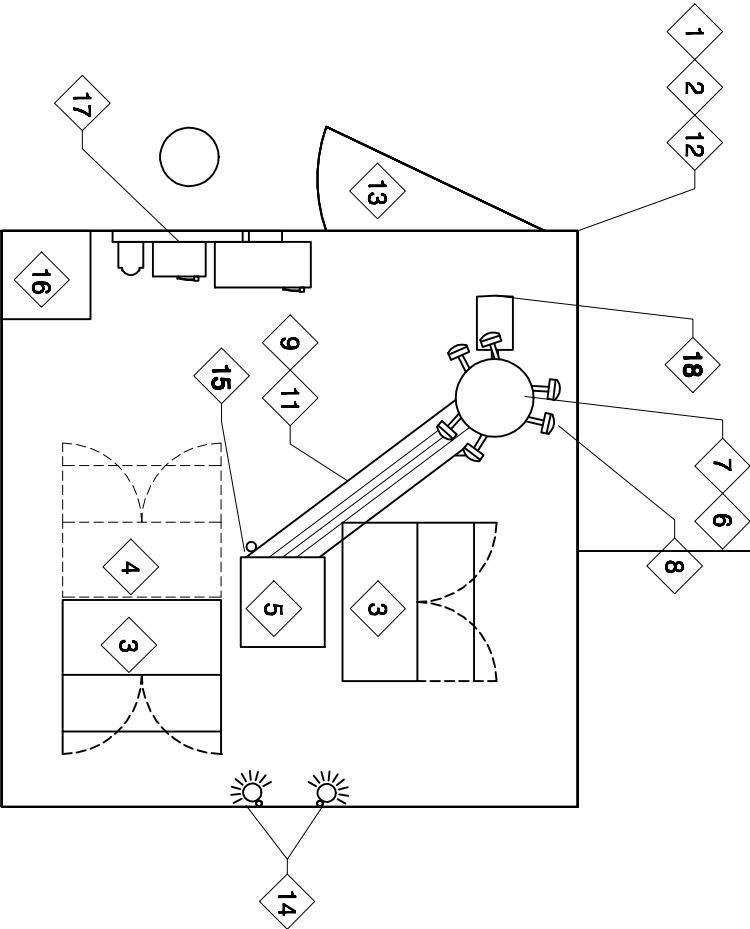

SITE PLAN

SCALE: 3/16=1'-0"

CONSTRUCTION PLAN KEYED NOTES

- 1. LEASE AREA LINE, REFER TO SHEET #1 FOR ADDITIONAL INFORMATION. (16' x 16')
- 2. CONCRETE PAD (8'x12')
- 3. PRIMARY BASE TRANSCIVER STATION (BTS) LOCATION (PROVIDED BY T-MOBILE).
- 4. SECONDARY BASE TRANSCIVER STATION (BTS) LOCATION (PROVIDED BY T-MOBILE).
- 5. SYSTEM DEMARCATION CABINET (BASE CONNECTION TO BTS UNITS) TELEPHONE CONNECTION AND ANTENNA CONNECTION
- 6. NEW ANTENNA SUPPORT STRUCTURE FOUNDATION ENGINEERING DONE BY OTHERS
- 7. NEW 60' ANTENNA SUPPORT STRUCTURE (PROVIDED BY T-MOBILE) SEE T-MOBILE PROJECT MANUAL FOR EXACT TYPE
- 8. PCS FLUSH MOUNT ANTENNAS (PROVIDED BY T-MOBILE)
- 9. COAXIAL CABLEING TO ANTENNAS (PROVIDED BY T-MOBILE)
- 10. SEE SHEETS #2, #3, #4 FOR GROUNDING TYPICAL
- 11. PEDESTAL MOUNTED WAVE GUIDE BRIDGE
- 12. NEW 6" CHAIN LINK FENCE TO SURROUND LEASE AREA PERIMETER
- 13. 6" WIDE SWINGING CHAIN LINK GATE (TO MATCH EXISTING GATES ON PREMISES)
- 14. TWO SPOTLIGHTS WITH 2 HOUR TIMERS MOUNTED ON 6" METAL POLE WITH T1 FRAME
- 15. GPS ANTENNA (PROVIDED BY T-MOBILE)
- 16. BATTERY CABINET (PROVIDED BY T-MOBILE).
- 17. METER BASE AND TELCO BOX PEDESTAL
- 18. NEW LIGHT TO BE MOUNTED ON POLE TO MATCH EXISTING LIGHTS ON PREMISES

SITE NOTES

- 1. VERIFY AZIMUTHS WITH FINAL SITE CONFIGURATION SHEET FROM R.F. ENGINEER.
- 2. PROVIDE 4" CONDUIT EQUIPPED WITH 1 PULL STRING AND (2) 6 PAIR 22 GAUGE WIRES. ALL TELCO CONDUITS AND TELCO WIRING MUST MAINTAIN A MINIMUM SEPERATION DISTANCE OF 18" AWAY FROM ALL A/C POWER CONDUITS AND WIRING.
- 3. DOGHOUSE EQUIPPED WITH 2 PLYWOOD BACKBOARDS 28"x21"x3/4" THICK.
- 4. DOGHOUSE EQUIPPED WITH 1-#6 GREEN GROUND WIRE 6 FEET LONG WITH 1 END CONNECTED TO GROUND BUS BAR.
- 5. 1 FOURPLEX 120 A/C OUTLET INSTALLED IN DOGHOUSE BUT NOT MOUNTED ON PLYWOOD BACKBOARDS.
- 6. PROVIDE TELECT 8 T1 DSX UNIT TO OPERATIONS FOR T1 MAINTENANCE. TELECT PART #010-6008-0001.

DATE:09-25-2008

DRAWN BY: TYSON HACKIN (COMLINK LS)

CHECKED BY: MIKE HANSEN

FILE: T-MOBILE/VALLEY JUNIOR HIGH SCHOOL

REVISIONS

DATE	DESCRIPTION	INITIALS
09-25-2008	ZONING DRAWINGS	TLH

NOT VALID UNLESS SIGNED



121 W. Election Rd.
Suite 330
Draper, UT 84020
801.860.0086
Fax 801.816.4420

COMLINK
LAND SERVICES

860 EAST 4500 SOUTH SUITE 312
SUITE 312
SALT LAKE CITY, UTAH 84107
801-288-4083

SITE NUMBER:

SL01634C

4186 SOUTH 3200 WEST
WEST VALLY CTTY, UT. 84119

a-2